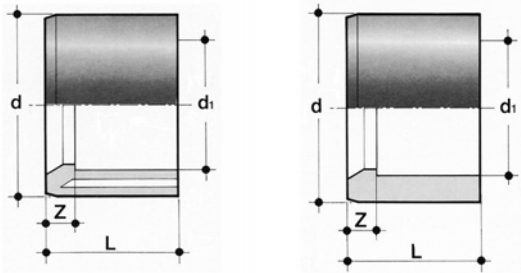


21.090.03
Reduktion, kurz

DIV

d	d ₁	Art.-Nr.	PN	Fig	L	Z	kg	LS	V
16	12	721.090.03.016012	16	A	14	2,0	0,002	1	1000
20	16	721.090.03.020016	16	A	16	2,0	0,003	1	550
25	20	721.090.03.025020	16	A	19	3,0	0,005	1	300
32	20	721.090.03.032020	16	A	22	6,0	0,015	1	200
32	25	721.090.03.032025	16	A	22	3,5	0,010	1	200
40	20	721.090.03.040020	16	B	26	9,0	0,025	1	120
40	25	721.090.03.040025	16	B	26	7,0	0,024	1	120
40	32	721.090.03.040032	16	A	26	4,0	0,017	1	120
50	32	721.090.03.050032	16	B	31	8,5	0,035	1	70
50	40	721.090.03.050040	16	A	31	5,0	0,032	1	60
63	32	721.090.03.063032	16	B	38	16,0	0,073	1	70
63	40	721.090.03.063040	16	B	38	11,5	0,075	1	70
63	50	721.090.03.063050	16	A	38	7,0	0,065	1	60
75	50	721.090.03.075050	16	B	44	13,0	0,120	1	28
75	63	721.090.03.075063	16	A	44	6,0	0,085	1	28
90	50	721.090.03.090050	16	B	51	20,0	0,200	1	36
90	63	721.090.03.090063	16	B	51	13,0	0,210	1	36
90	75	721.090.03.090075	16	A	51	7,0	0,150	1	36
110	63	721.090.03.110063	16	B	61	23,0	0,340	1	18
110	75	721.090.03.110075	16	B	61	17,0	0,360	1	18
110	90	721.090.03.110090	16	A	61	9,0	0,270	1	18
125	110	721.090.03.125110	16	A	69	8,0	0,285	1	1
140	90	721.090.03.140090	16	B	76	25,0	0,730	1	16
140	110	721.090.03.140110	16	A	76	17,0	0,645	1	16
140	125	721.090.03.140125	16	A	76	9,5	0,350	1	16
160	90	721.090.03.160090	16	B	86	35,0	1,040	1	9
160	110	721.090.03.160110	16	B	86	24,0	0,945	1	9
160	140	721.090.03.160140	16	A	86	10,0	0,565	1	9
200	160	721.090.03.200160	16	B	109	20,0	1,620	1	6
225	160	* 721.090.03.225160	16	B	119	33,0	1,840	1	6
225	200	* 721.090.03.225200	16	A	119	13,0	1,380	1	6
250	160	721.090.03.250160	10	B	132	45,0	3,100	1	6
250	200	721.090.03.250200	10	A	132	25,0	3,500	1	6
250	225	721.090.03.250225	10	A	132	12,0	2,100	1	6
280	225	721.090.03.280225	10	B	147	27,0	4,300	1	4
315	200	721.090.03.315200	10	B	165	58,0	8,650	1	4
315	225	721.090.03.315225	10	B	165	45,0	8,100	1	4
315	250	721.090.03.315250	10	B	165	33,0	5,080	1	4
315	280	721.090.03.315280	10	A	165	18,0	4,590	1	4

* Mit reduziertem Sicherheitsfaktor.